


CLASSICS

The Optimal Dry range provides automatic and manual hand dryers with a hard-wearing and attractively designed plastic casing, which makes them suitable for use in prestigious buildings.

The printed circuit boards have been specifically designed and tested to guarantee long-term operation.

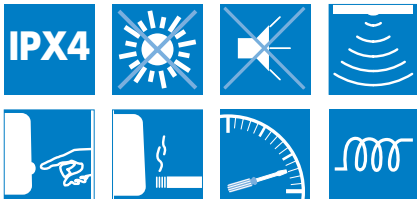

NEW

Optimal Dry A

Automatic hand dryer

VORTICE AUTOMATIC AND MANUAL HAND DRYERS

- Automatic start-up
Fitted with an infra-red sensor that starts the dryer automatically when hands enter the sensor detection field: this can be adjusted using a "trimmer" inside the product.
- Easier installation and maintenance.
- Electrically insulated splashproof IPX4.
- UV resistant ABS plastic.
- New Printed Circuit board.
- Dust filter.
- Low noise.
- Maximum safety.

	NEW
	Optimal Dry A automatic hand dryer
Code	19229
Hz	50/60
Voltage	220-240
Watt	2000
Watt (motor)	65
Rated current (A)	9
Air flow (m ³ /h)	170
Approvals	
Weight (Kg)	2.6
Insulation	<input checked="" type="checkbox"/> cl.II
Protection	IPX4
IK	9
Noise Level (at 1 m) dB(A)	61.4





NEW

Optimal Dry
Manual hand dryer

■ Manual start-up.
This is activated by pressing the button, which is protected against improper and violent use. The air can be programmed to operate from 20 to 60 seconds.



	NEW
	Optimal Dry manual hand dryer
Code	19226
Hz	50/60
Voltage	220-240
Watt	2000
Watt (motor)	65
Rated current (A)	9
Air flow (m ³ /h)	170
Approvals	
Weight (Kg)	2.6
Insulation	cl.II
Protection	IPX4
IK	9
Noise Level (at 1 m) dB(A)	61.4